

MODEL RM-1000-ENCL



II_RM-1000-ENCL_A1

DANGER!



HAZARDOUS VOLTAGES MAY BE PRESENT DURING INSTALLATION.

Electrical shock can cause death or serious injury.

Installation should be done by qualified personnel following all national, state and local electrical codes.



**BE SURE POWER IS DISCONNECTED PRIOR TO INSTALLATION!
FOLLOW NATIONAL, STATE AND LOCAL CODES.
READ THESE INSTRUCTIONS ENTIRELY BEFORE INSTALLATION.**

SymCom's Model RM-1000-ENCL is a weather and tamper-resistant protective cover for the Model RM-1000. It can be added to a new or existing installation.

INSTALLATION INSTRUCTIONS

New Installation

1. Follow instructions in the RM-1000 User's Guide with the Mounting Template to prepare the panel.
2. Open and remove the front cover from RM-1000-ENCL enclosure.
3. Place RM-1000 in the enclosure and align the mounting holes with the pre-drilled holes in the RM-1000-ENCL.
4. Fasten enclosure and remote module into place on the panel using the screws supplied with the RM-1000. Tighten the screws to no more than 10 in-lbs.
5. Finish installation per RM-1000 User's Guide.
6. Reinstall the front cover on the RM-1000-ENCL enclosure.


Existing Installation

1. Open and remove the front cover from RM-1000-ENCL enclosure
2. Remove RM-1000 from panel. Do not discard screws.
3. Place RM-1000 in the enclosure and align the mounting holes with the pre-drilled holes in the RM-1000-ENCL.
4. Fasten enclosure and remote module into place on the panel using the screws supplied with the RM-1000. Tighten the screws to no more than 10 in-lbs.
5. Finish installation per RM-1000 User's Guide.
6. Reinstall the front cover on the RM-1000-ENCL enclosure.

RM-1000-ENCL SPECIFICATIONS

General Characteristics	
Dimensions	6.4" H x 6.3" W x 1.7" D
Weight	1.4 lbs.
Enclosure	Cold rolled steel, 0.048" thick
Mounting Method	Uses same hardware supplied with RM-1000
Torque	10 in-lbs
Removable Front Cover	Latches in place and fastened with Zeus fastener
Security	Padlock tab (padlock not included)

DIMENSIONS

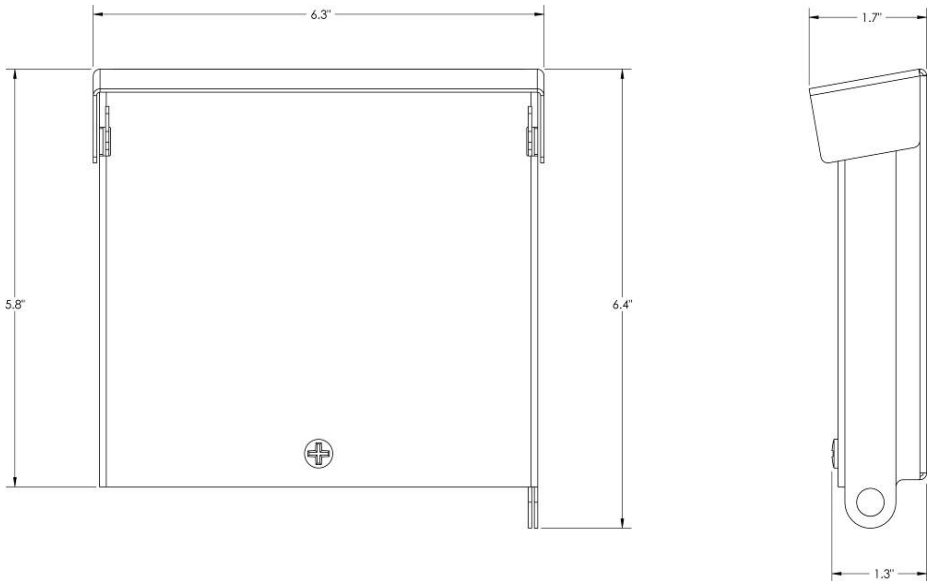

For warranty information, please see **Terms and Conditions** at
www.symcom.com

*Visit us at www.symcom.com to see
our complete product listing!*

Need something special?

*Contact SymCom today
for your custom solution!
800-843-8848*